


# IR A4

## Distributed Control Array

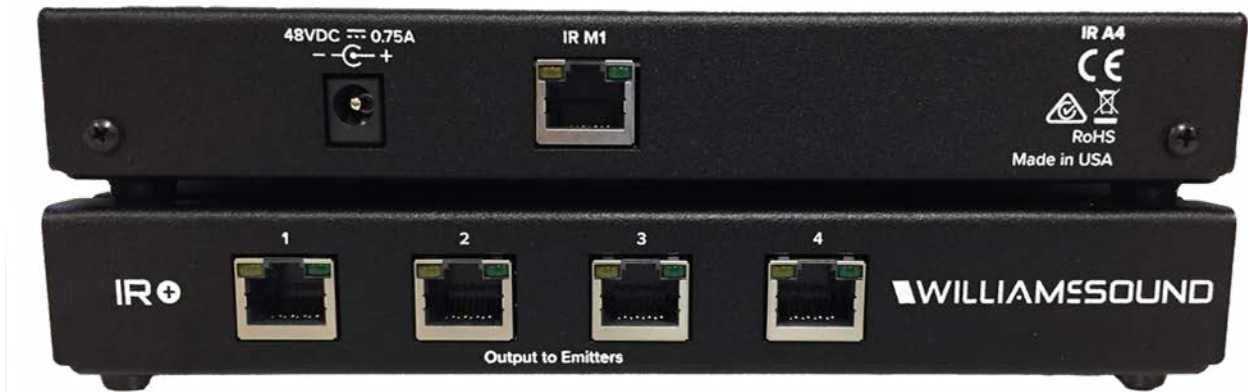

### IR A4

Dimensions:	7.6"W x 6.6"D x 1.1"H (193mm x 168mm x 28mm)
Weight:	2.4 lb (1100g)
Color:	Black
Power:	48 VDC, 0.75A
Connectivity:	+48VDC Power, RS-485 communication, and Baseband signals for IR transmission are all provided via CAT5e cable(s) inserted into an RJ-45 jack from the IR M1 and out to the IR E4(s).
Heat Dissipation:	1W
Max Cable Length:	328 feet (100m)
Plenum Rating:	The IR A4 is not rated for use in plenum spaces and will need to be installed in a plenum box for use in such areas.
Approvals:	CE, FCC, RoHS, RCM, WEEE, CB Scheme, ISED, VCCI
Warranty:	2 years

Note: The IR A4 is not a stand alone system and requires an IR M1 modulator and IR E4 emitter to function.

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**



この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。VCCI-A

This is a Class A equipment. Operation of this equipment in a residential environment could cause radio interference. In such a case, the user may be required to take corrective actions. VCCI-A